



EM-16

ORDERCODE D143161
ORDERCODE D143182



Highlite International B.V.

Vestastraat 2
6468 EX Kerkrade
The Netherlands

SHOWELECTRONICS FOR PROFESSIONALS

Congratulations!

You have bought a great, innovative product from DAP Audio.
The DAP Audio EM-16 brings excitement to any venue. Whether you want simple plug-&-play action or a sophisticated show, this product provides the effect you need.

You can rely on DAP Audio, for more excellent audio products.
We design and manufacture professional audio equipment for the entertainment industry.
New products are being launched regularly. We work hard to keep you, our customer, satisfied.
For more information: iwant@dap-audio.info

You can get some of the best quality, best priced products on the market from DAP Audio.
So next time, turn to DAP Audio for more great audio equipment.
Always get the best -- with DAP Audio !

Thank you!



DAP Audio

DAP Audio EM-16™ Product Guide

Warning	3
Unpacking Instructions	3
Safety Instructions	3
Operating Determinations	4
Return Procedure	4
Claims	4
Description of the device	5
Features	5
Overview	5
Installation	5
Set Up and Operation	6
Placing the batteries	6
Altering the channel setting	6
Tips for achieving maximum performance	7
Approval	7
CE Certificate	8
Connection Cables	10
Maintenance	11
Troubleshooting	11
Product Specification	12

Warning



**FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY
BEFORE YOUR INITIAL START-UP!**

Unpacking Instructions

Immediately upon receiving this product, carefully unpack the carton and check the contents to ensure that all parts are present, and have been received in good condition. Notify the dealer immediately and retain packing material for inspection if any parts appear damaged from shipping or the carton itself shows signs of mishandling. Save the carton and all packing materials. In the event that a fixture must be returned to the factory, it is important that the fixture be returned in the original factory box and packing.


Your shipment includes:

- EM-16
- 8 Colour-coded protection caps
- Stand mount
- Storage case
- Mini screw driver
- User manual

Safety Instructions

Every person involved with the installation, operation and maintenance of this system has to:

- be qualified
- follow the instructions of this manual

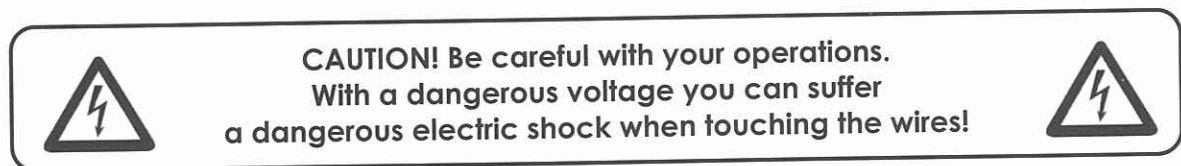

Before you initial start-up, please make sure that there is no damage caused by transportation. Should there be any, consult your dealer and do not use the system.

To maintain perfect condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this manual.

Please consider that damages caused by manual modifications to the system are not subject to warranty.

This system contains no user-serviceable parts. Refer servicing to qualified technicians only.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorized modification to the system.

- Never remove warning or informative labels from the unit.
- Never leave any cables lying around.
- Do not open the device and do not modify the device.
- Do not switch the system on and off in short intervals, as this would reduce the system's life.
- Do not drive the inputs with a signal level bigger, than required to drive the equipment to full output.
- Only use device indoor, avoid contact with water or other liquids.
- Avoid flames and do not put close to flammable liquids or gases.

- Make sure you don't use the wrong kind of cables or defective cables.
- Please turn off the power switch, when changing the power cord or signal cable, or select the input mode switch.
- If the system has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your system. Leave the system switched off until it has reached room temperature.
- If your Dap Audio device fails to work properly, discontinue use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Dap Audio dealer for service.
- Repairs, servicing and electric connection must be carried out by a qualified technician.

Operating Determinations

If this system is operated in any other way, than the one described in this manual, the product may suffer damages and the warranty becomes void.

Any other operation may lead to dangers like short-circuit, burns, electric shock, etc.

Return Procedure

Returned merchandise must be sent prepaid and in the original packing, call tags will not be issued. Package must be clearly labeled with a Return Authorization Number (RMA number). Products returned without an RMA number will be refused. Highlite will not accept the returned goods or any responsibility. Call Highlite 0031-455667723 or mail aftersales@highlite.nl and request an RMA prior to shipping the device. Be prepared to provide the model number, serial number and a brief description of the cause for the return. Be sure to properly pack the device, any shipping damage resulting from inadequate packaging is the customer's responsibility. Highlite reserves the right to use its own discretion to repair or replace product(s). As a suggestion, proper UPS packing or double-boxing is always a safe method to use.

Note: If you are given an RMA number, please include the following information on a piece of paper inside the box:

- 1) Your name
- 2) Your address
- 3) Your phone number
- 4) A brief description of the symptoms

Claims

The client has the obligation to check the delivered goods immediately upon delivery for any shortcomings and/or visible defects, or perform this check after our announcement that the goods are at their disposal. Damage incurred in shipping is the responsibility of the shipper; therefore the damage must be reported to the carrier upon receipt of merchandise.

It is the customer's responsibility to notify and submit claims with the shipper in the event that a device is damaged due to shipping. Transportation damage has to be reported to us within one day after receipt of the delivery.

Any return shipment has to be made post-paid at all times. Return shipments must be accompanied with a letter defining the reason for return shipment. Non-prepaid return shipments will be refused, unless otherwise agreed in writing.

Complaints against us must be made known in writing or by fax within 10 working days after receipt of the invoice. After this period complaints will not be handled anymore.

Complaints will only then be considered if the client has so far complied with all parts of the agreement, regardless of the agreement of which the obligation is resulting.

Description of the device

Features

The EM-16 is a professional wireless microphone from Dap Audio. There are two types ranges available:

D143161, frequency range 614 – 638Mhz

D143182, frequency range 822 – 846Mhz

- PLL synthesized 16 switchable frequencies.
- Operation in the UHF range.
- Compatible with Lavalier or headset microphones.

Overview



Fig. 1

Installation

Remove all packing materials from the EM-16. Check that all foam and plastic padding is removed.

Always disconnect from electric mains power supply before cleaning or servicing.

Damages caused by non-observance are not subject to warranty.

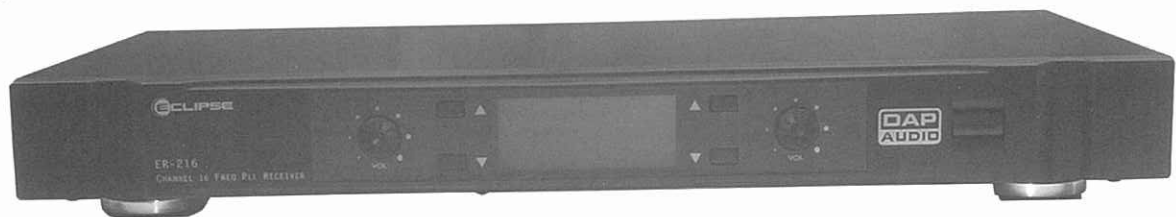


Fig. 2

A suitable (optional) receiver is the DAP ER-216 (D143061B or D143082B).

You can change the color cap at the end of the microphone, whenever you feel like it.

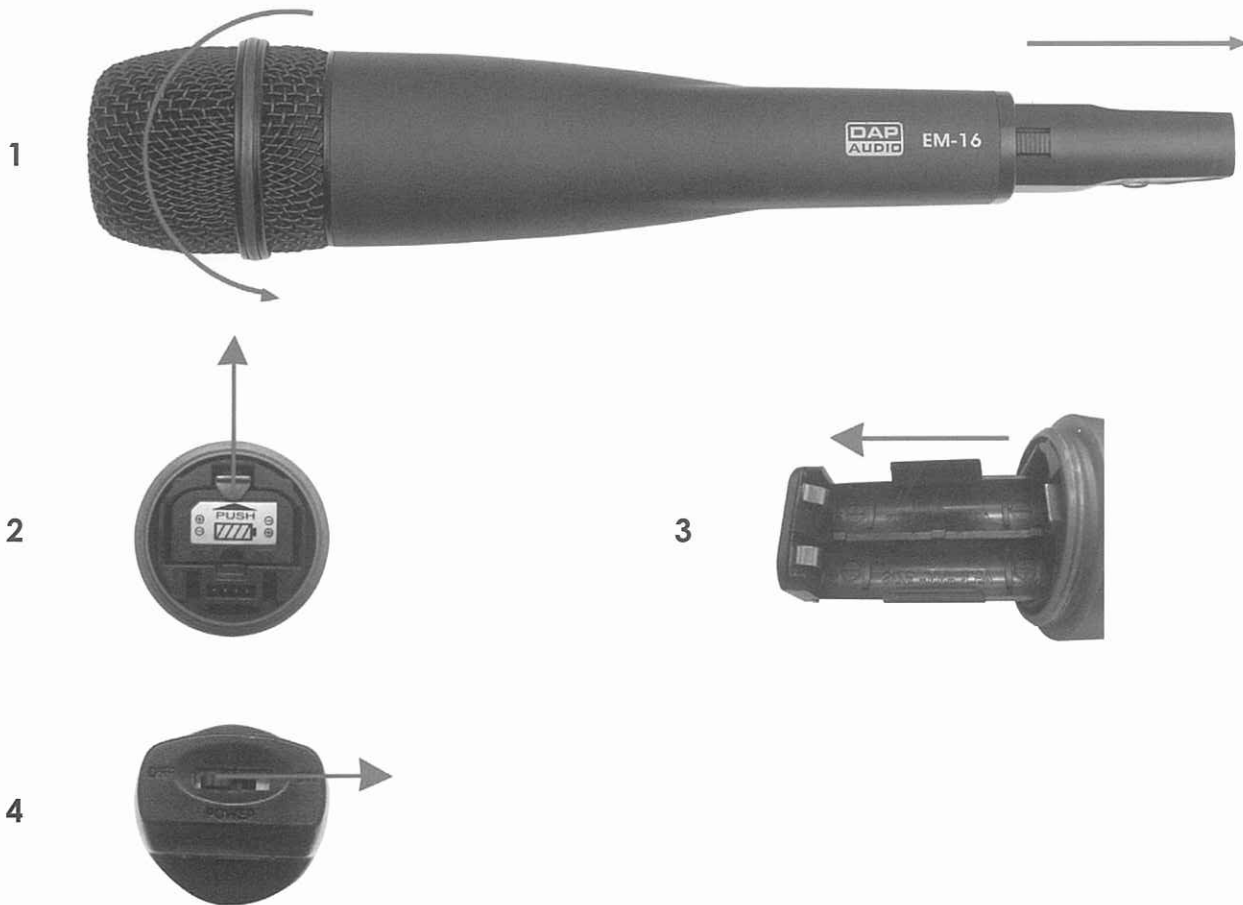


Fig. 3

Set Up and Operation


Before turning the EM-16 on, always make sure that the frequency matches your country.

Placing the batteries



- 1) Unscrew the grill of the microphone counter clockwise and take the plastic cover off from the back.
- 2) Once you have removed the grill. You see a small lip, which you have to push.
- 3) Pull out the battery holder. Put 2 batteries (2x Battery UM3, AA1.5V) in the holder. Pay attention to the polarity of the batteries and put them in correctly.
- 4) Set the switch on the back to ON. Now the LED will light green. If the LED lights up red, you have to change the batteries.

Altering the channel setting

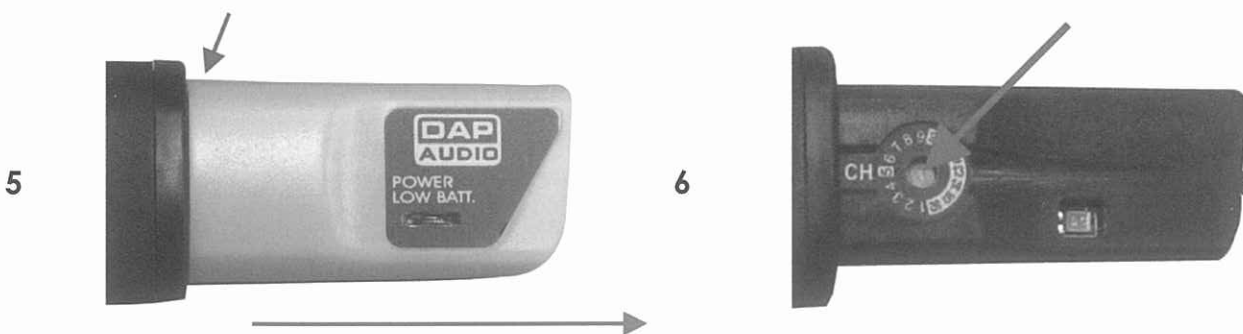

- 5) Use your thumb to unlock the lever and gently remove the color cap from the microphone.
- 6) Rotate the channel switch using the supplied screwdriver.
- 7) Place the color cap back.

Tips for achieving maximum performance.

- Make sure you can always see a receiver antenna from the transmitter position.
- Keep the distance from transmitter to receiver antenna as short as possible.
- Point the receiver antennas away from each other at 45 degrees angle from vertical position.
- Avoid placing the receiver antennas near metal surfaces and obstructions.
- Replace battery as soon as low battery LED lights.
- If stacking or rack mounting receivers in a multiple system setup. Do not allow antennas to cross.
- Perform a walk-through before performance or presentation. If dead spots are found, adjust the location of the receiver. If dead spots remain, mark the dead spots and avoid them.

Approval

The DAP D143161 and the D143182 are Class II wireless devices.

D143161: 614-638MHz for use in: Austria, Belgium, Denmark, France, Italy, Luxemburg, Netherlands, Poland, Sweden, Turkey, Switzerland, Turkey.
D143182: 822-846 MHz for use in: Germany.

Exclusion of liability

The frequency tables in this publication are made according to national laws and regulations. The frequencies are checked on a regular basis. We don't take any responsibility for eventual discrepancies between our listed frequencies and the frequencies actually approved in a given country. We strongly suggest you to inform in your own country or region for any changes or adaptations regarding the allowed frequencies.

Be aware that in some countries, you are only allowed to partly use the frequency range of the device or use the frequency range of the device as a secondary user. If your country is not listed above it is still possible that there are exceptions. Therefore, we strongly advise you to consult your local authority as listed below:

Telecoms & Postal Regulatory Authorities in Europe

Austria: Rundfunk und Telekom Regulierungs-GmbH	www.rtr.at
Belgium: Belgian Institute of postal services and telecommunications (BIPT)	www.bipt.be
Czech Republic: Czech Telecommunication Office	www.ctu.cz
Denmark: National Telecom Agency	www.tst.dk
Finnland: Finnish Communications Regulatory Authority (FICORA)	www.ficora.fi
France: Autorité de Régulation des Télécommunications (ART)	www.art-telecom.fr
Germany: Die Bundesnetzagentur	www.bundesnetzagentur.de
Greece: National Telecommunications Commission (EET)	www.eetf.gr
Hungary: Communication Authority (HIF)	www.hif.hu
Iceland: Post and Telecom Administration (PTA)	www.pta.is
Ireland: Commission for Communications Regulation (ComReg)	www.comreg.ie
Italy: Italian Communications Authority (AGC)	www.agcom.it
Latvia: Telecommunication State Inspection	www.vei.lv
Liechtenstein: Office for Communications (AK)	www.ak.li
Lithuania: Radio Administration	www.rtt.lt
Luxembourg: Institut Luxembourgeois des Télécommunications (ILT)	www.etat.lu/ILT
Netherlands: Onafhankelijke Post en Telecommunicatie Autoriteit (OPTA)	www.opta.nl
Agentschap Telecom	www.agentschap-telecom.nl
Ministry of Economic Affairs	www.ez.nl
Norway: Norwegian Post and Telecommunications Authority (NPT)	www.npt.no
Poland: Urząd Regulacji Telekomunikacji (URT)	www.urt.gov.pl
Portugal: Autoridade Nacional De Comunicações (ICP-Anacom)	www.anacom.pt
Slovenia: Agencija za telekomunikacije, radiodifuzijo in pošta	www.atrp.si



DECLARATION OF CONFORMITY

Supplier Details

Name

Highlite International BV

Address

Vestastraat 2
6468EX Kerkrade
The Netherlands

Product Details

Product Name

EM-16 Wireless PLL 613-638MHz Handheld microphone 16 Freq

Ordercode

D143161

Trade Name

DAP AUDIO

Applicable Standards Details

R&TTE Directive : 1999/5/EC

Radio Spectrum Matter: EN 300 422-2 V1.2.2 (2008-03)

Emmission/Immunity: EN 301 489-1 V1.8.1 (2008-04)
EN 301 489-9 V1.4.1 (2007-11)

Low voltage Directive : 2006/95/EC

EN 60065:2002+A1:2006+A11: 2008

Supplementary Information

The conformity to above standards is verified by ETC.

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

S. ildiz

Issued Date

Aug. 5, 2010

Highlite International BV.
Vestastraat 2, 6468 EX Kerkrade,
The Netherlands


Signature of representative



DECLARATION OF CONFORMITY

Supplier Details

Name

Highlite International BV

Address

Vestastraat 2
6468EX Kerkrade
The Netherlands

Product Details

Product Name

EM-16 Wireless PLL 822-846MHz Handheld microphone 16 Freq

Ordercode

D143182

Trade Name

DAP AUDIO

Applicable Standards Details

R&TTE Directive : 1999/5/EC

Radio Spectrum Matter: EN 300 422-2 V1.2.2 (2008-03)

Emmission/Immunity: EN 301 489-1 V1.8.1 (2008-04)
EN 301 489-9 V1.4.1 (2007-11)

Low voltage Directive : 2006/95/EC

EN 60065:2002+A1:2006+A11: 2008

Supplementary Information

The conformity to above standards is verified by ETC.

Declaration


I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

S. ildiz

Issued Date

Aug. 5, 2010


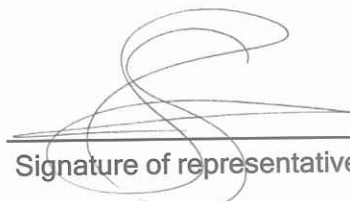


Signature of representative

Highlite International BV.
Vestastraat 2, 6468 EX Kerkrade,
The Netherlands


Connection Cables

Take care of your cables, always holding them by the connectors and avoiding knots and twists when coiling them: This gives the advantage of increasing their life and reliability. Periodically check your cables. A great number of problems (faulty contacts, ground hum, discharges, etc.) are caused entirely by using unsuitable or faulty cables.

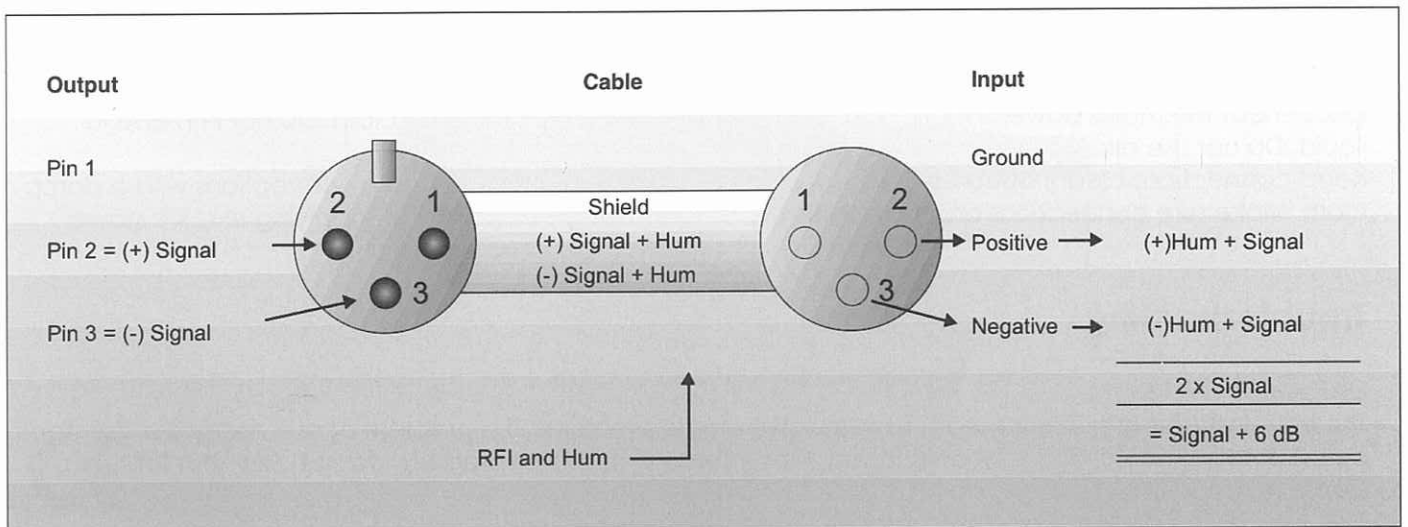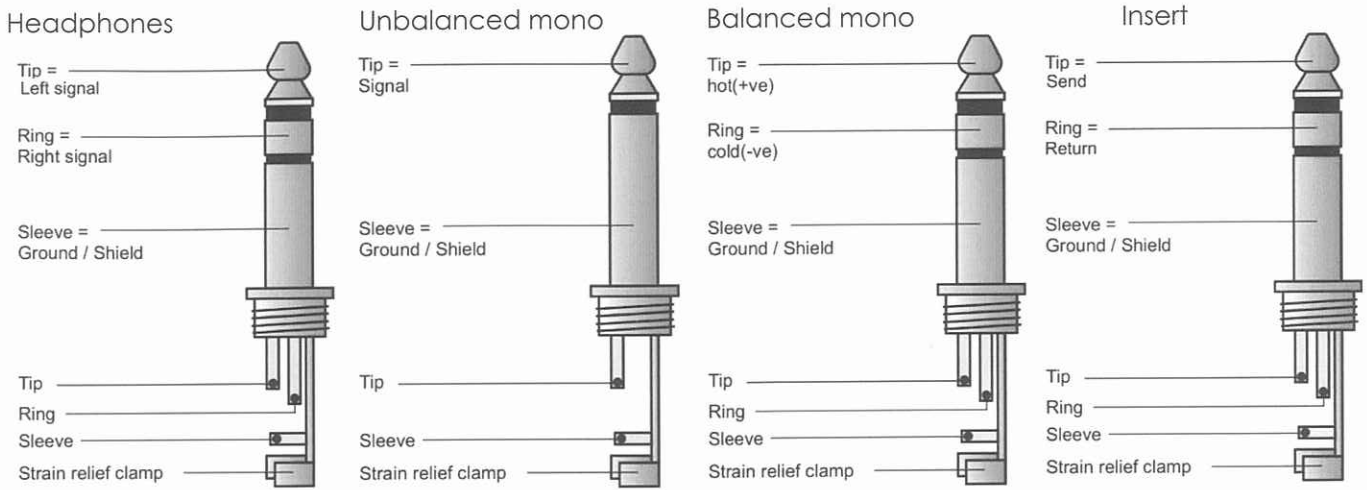

Compensation of interference with balanced connections

Balanced use with XLR connectors

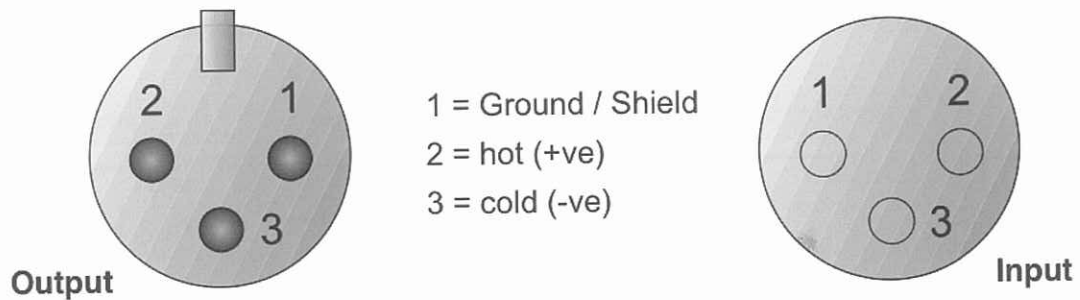

For unbalanced use PIN 1 and PIN 3 have to be bridged

Maintenance

The DAP Audio EM-16 requires almost no maintenance. However, you should keep the unit clean. Disconnect the mains power supply, and then wipe the cover with a damp cloth. Do not immerse in liquid. Do not use alcohol or solvents. Keep connections clean. Disconnect electric power, and then wipe the audio connections with a damp cloth. Make sure connections are thoroughly dry before linking equipment or supplying electric power.

Troubleshooting

DAP Audio EM-16


This troubleshooting guide is meant to help solve simple problems. If a problem occurs, carry out the steps below in sequence until a solution is found. Once the unit operates properly, do not carry out following steps.

1. If the device does not operate properly, unplug the device.
2. Check power from the wall, all cables, connections, etc.
3. If all of the above appears to be O.K., plug the unit in again.
4. If nothing happens after 30 seconds, unplug the device.
5. Return the device to your DAP Audio dealer.

Product Specification

Type:	Dynamic, moving coil.
Polar pattern:	Cardioid
Frequency Response:	50-16.000 Hz
Sensitivity (1000 Hz):	2,2 mV/Pa (1 Pa = 94 dB SPL)
Max. SPL:	138 dB (1% THD)
Impedance:	500 Ohm
Power supply:	2x Battery UM3, AA1.5V (not included)
Accessories:	8 Colour-coded protection caps 1 stand mount 1 storage case Mini screw driver

Carrier Frequency Range	
D143161:	614-638MHz
D143182:	822-846MHz
RF Output:	10 mW
Stability:	±0.005%
Frequency Deviation:	±48 kHz
LCD Display:	Low battery, Power On/Off
Controls:	Power On/Off, Channel select
Spurious Rejection:	<-60 dBC
Dimensions:	Ø 50 mm x L 260 mm
Net. Weight:	0,262 kg

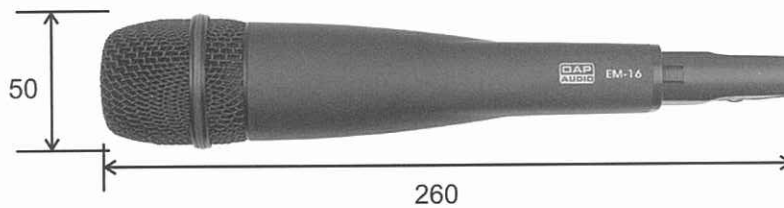

Design and product specifications are subject to change without prior notice.



Website: www.Dap-audio.info
Email: service@highlite.nl